


SOLAR PANEL



When you're recharging a portable power station, our monocrystalline solar panel is efficient, reliable, and easy to use. Providing power in an eco-friendly manner.

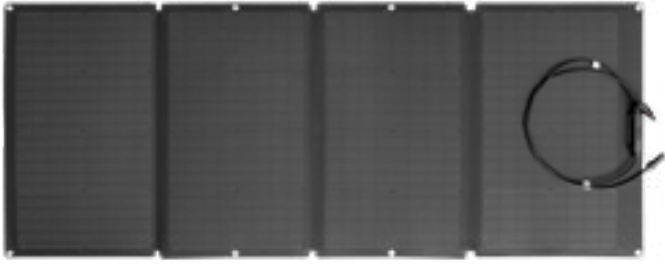

160W SOLAR PANEL:

Rated Power: 160W ($\pm 5W$)
Open Circuit Voltage: 21.6V (V_{mp} 18.2V)
Short Circuit Current: 9.6A (I_{mp} 8.8A)
Efficiency: 21-22%
Connector Type: MC4 to XT60
Cell Type: Monocrystalline silicon

160W SOLAR PANEL

The EcoFlow 160W solar panel is portable, foldable, and compact, weighing just 15.4lbs/7kg. From camping to outdoor activities, unfold the solar panel and start capturing solar power in seconds.

GENERAL:

Weight: 15.4 lbs (7kg) Solar Panel 11 lbs (5kg)
Waterproof IP Ratings: IP67
Unfolded Dimensions: 26.8×61.8×1 in (68×157×2.4cm)
Folded Dimensions: 26.8×16.5×1 in (68×42×2.4cm)



ACCESSORIES

PRODUCT	NAME	DESCRIPTION
	Solar MC 4 Parallel Connection Cable	Solar MC 4 parallel connection cable can be used to connect 4 or 6 solar panels to charge your EcoFlow product.
	Suction Cups for Solar Panel	Suction Cups (8pcs per package): Easy to attach to glass, the car roof, and other smooth surfaces. Best method of securing solar panels.
	MC4 to XT60 Solar Panel Charging Cable	With this EcoFlow MC4 to XT60 cable, a solar panel with a standard MC4 output can be connected to the power station.
	AC Charging Cable	Connect to a wall outlet to recharge your power station.
	Car Charging Cable	Connect your car to recharge your power station.
	DC5521-DC5525 Cable	Connect appliances with DC type port. e.g, computer monitor, mini-computer, LED light, Wi-Fi router.
	Expansion Power Cable	Connect your RIVER 600 PRO with a RIVER 600 PRO extra battery.